

W5

Custom-built wheelchair for active use

Order Form

User Information	
User Name	
Address	
Phone	
E-mail	
Weight	_____ kg
Height	_____ cm
☐ Offer Only	☐ Order
Payment Details	
EAN number	
Your PO Number	
Invoice Recipient	
Phone	
E-mail	
Contact	
Name and Address	
Phone	
E-mail	
Shipping Information	
☐	Consultant
☐	User
☐ Other address	
Optional Notes	
Consultant	Date



Default Equipment

- Tailor-made rigid-frame wheelchair
- Fully welded or adjustable versions available
- Made of 7020 T6 aluminum
- Adjustable seat and back upholstery
- Impact-resistant anodised frame
- Drive wheels with quick-release axles

Tailor-made Wheelchair

Remarks

REMARKS

- ☐ this combination/option is available
- this combination/option is **non-available**
- ! this information is mandatory and must always be filled in

For options or solutions not mentioned in this order form, please, contact 49 Bespoke Inc.
See contact information at the starting of the page.

DECAL(S): The user's name or other message(s) printed on the frame

! Model (mandatory)

W5	☐	Original
W5 S	☐	Streamlined lower frame
W5 K	☐	Short frame, the footrest is between casters
W5 D	☐	Double footrests



! Colour (mandatory) / Farve (skal udfyldes)

6190 0000 1009	☐	Black anodized	6190 0000 2309	☐	Golden brown
6190 0000 1109	☐	Silver anodized	6190 0000 2409	☐	Red
6190 0000 1209	☐	Blue anodized	6190 0000 2509	☐	Shiny black
6190 0000 1309	☐	Red anodized	6190 0000 2609	☐	Orange
6190 0000 2109	☐	White	6190 0000 2709	☐	Blue
6190 0000 2209	☐	Green	6190 0000 2809	☐	Matt black
6190 0000 3009	☐	Customized color	! Color code		



Custom-built from Drawings/notes (go to page 14)

☐	☐	Custom ideas and/or solutions from individually designed drawings
--------------------------	--------------------------	---


! Frame Data (mandatory)/Rammedata (skal udfyldes)

1110 ???? FF09	[!]	SW: Seat width - outer measurement (std. 36, 38, 40, 42, 45, 48 cm)			_____ cm	
1110 ???? FF09	[!]	FD: Frame depth (default 44 cm) (see note (2) below)	_____ cm	SD-min (2) = Shortest seatd. (std. 39 cm)	_____ cm	


(2) Seat adjustability: You must fill in the SD minimum and define the minimum seat depth required.

6160 00?? 0009	[!]	SH-r: Seat height from the rear edge seat to the floor (default 42 cm)		[!]	_____ cm	
6150 00?? 0009	[!]	SH-f: Seat height from the front of the seat to the floor (default 48 cm)			_____ cm	
6115 00?? 0009	[!]	C: Camber angle rear axle 1°-3°-5° (default 3°)			_____ °	
81?? ???? FF09	[]	BH: Fixed back height _____ cm	BH: Adjustable back height (default 35-41 cm)			
	[]	BH: Back height (see note (1))		Fill in the BH-max and H-min	BH-max: _____ cm BH-min: _____ cm	

(1) For adjustable back height: Fill in the BH-max with the necessary max. back height (max 6 cm more than BH, straight back tubes only)

	[!]	BF: From the front of backrest to the front of footrest (default 60 cm)	_____ cm	
These 3 measures are normally optimized during the production process	[]	BC: From the front of the backrest to the center of the casters (default 50 cm)	_____ cm	
	[]	TW: Total width including wheels (minimum SW + 17cm, C=1°)	_____ cm	
	[]	CW: Distance between the casters (center to center) CWmin = FF+15 cm / 100 mm wheel	_____ cm	



! Rear Axle (mandatory)





6110 0000 0001	[]	Adjustable axle	!	RA: (default 8 cm)	_____ cm	
6110 00?? 0009	[]	Fixed axle, welded	!	RA: (standard 8 cm)	_____ cm	
Rear axle system	[]	1/2" Quick-release (default / Standard)	[]	Wrex 25 mm, 0-tolerance axle, Wrex wheel only (p. 13)		
6910 0001 0100	[]	Extra rear axle for use with hand bike	!	HRA:	_____ cm	
Rear wheel size	[!]	_____ (std. 24")	Front wheel size	_____ " (std. 4")		Selection page 12-13



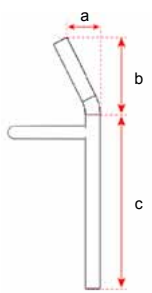
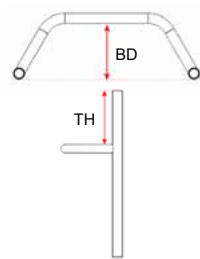
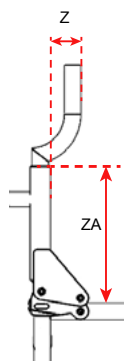
Wheel-locks, Low Fixation







6910 0002 0001	[]	Extra tubes welded on the frame to be used for wheel-locks
----------------	-----	--


Sideguard Attachment System (our recommended solution)			
6810 0001 0005	[]	Fixed by welding (aluminum only)	For welded back only
6810 0001 0050	[]	Fixed by screws on welded tabs	For fixed back only
6810 0001 0001	[]	Lift-off sideguards (standard)	12 cm from back
	[]	Fittings for lifting the detachable sideguards (SW + 2 cm between sideguards)	Spinergy: Narrow chair
6810 0001 0002	[]	Fittings for fixed sideguards with space for the folding back (width + 2 cm)	12 cm from back
9510 3848 0160	[]	Kit for enlarging the distance between the sideguards (+ 3 cm)	
8831 2410 1002	[]	Mounting bracket on back rest for swing away armrest (choose armrest, page 11)	Armrest page 11!
6810 0001 0010	[]	Foldable, the sideguard stores on top of seat (tap welded on back tubes)	







! Choice of Seat (mandatory)			
6100 00?? 0009	[]	Ergonomically designed seat (default)	[] d:(std 12 cm) _____ cm 
6100 0000 0009	[]	Straight seat tubes	

! Front Frame (mandatory)			
Standard is U-V and FF depends upon the SW (seat width) as follow:		SW/FF : 36/25,5 – 38/25,5 – 40/27,5 – 42/29,5 – 45/32,5 – 48/35,5 cm	
6120 00?? 0009	[]	FF: U-V front frame	_____ cm 
	!	FB: Length to the front bend of the front frame (default 15 cm)	_____ cm 
6130 00?? 0009	[]	FF: U front frame	_____ cm 
	!	DF: Length of seat tube before bend inwards for U front frame (std 30 cm)	_____ cm 
6140 00?? 0009	[]	FF: V front frame, fixed welded footrest	_____ cm 
8299 9920 0001	[]	DF: Double footplates, flip up (W5 D only)	_____ cm FF minimum 29 cm
8299 9903 0010	[]	SF: Single flip-up (minimum and default size 29,5 cm)	_____ cm FF minimum 29,5 cm

! Back System (mandatory)						
8111 ???? 1009	☐	Folding back $\pm 4^\circ$ (default)	☐	Folding back $+4^\circ$ to $+12^\circ$	 + Backwards - To the front	
8121 ???? 1009	☐	Fixed back, welded	☐	BA: Back angle _____ $\pm$ cm		
8131 0000 1009	☐	Light style folding back (Between sideguards: SW + 14 mm)				
8122 0020 0002	☐	Narrow back	NB: The wide back is not available in combination with the folding back	UBW _____ cm	LBH _____ cm	
8122 0020 0001	☐	Wide back		UBW _____ cm	LBH _____ cm	
	☐	Bended on the back rest (1)	a: Backwards (+) ☐	a: Forwards (-) ☐	_____ cm	(1) When choosing bend on back, fill in a, b and c. 
	!	b: Length of the upper, bended part of the back tubes			_____ cm	
	!	c: Distance from the seat tube to the bend			_____ cm	
		Shape of the backrest tube	Standard ☐	Rounded ☐		
	!	BD: Depth of the backrest tube (BRT) depth (default 12 cm)			_____ cm	
	!	TH: The distance between the backrest and the top of the backrest's tubes (default 12 cm)			_____ cm	
8122 0020 01??	☐	Wing back ILSA: Integrated multi-adjustable back support				
	☐	Z: Firmspring 3 cm				
	☐	Z: Firmspring 5 cm				
	☐	Z: Firmspring 7 cm				
	☐	Z: Custom depth _____ cm				
	!	ZA: Height from the seat to the start bend ILSA (default 19 cm)			_____ cm	
8122 0020 0060	☐	Plate welded on the back for mounting of body support system				
6910 0001 0130	☐	Bracket for locking the folded backrest				

! Footrest (mandatory)					
6145 00?? 0001	[]	VSL: Front of the seat upholstery to the rear edge of the footrest std. 39 to 45 cm		_____ cm	
If both VSL and FRH is filled out, VSL will be leading.	[]	FRH: Height of the footrest (Alternative to VSL)	Front FRH-1: _____ cm	Rear FRH-2: _____ cm	
	[]	Footrest with an adjustable-by-angle footplate (default depth 12 cm)		[] FRD 12 cm [] FRD 16 cm FRD: _____ cm	
8219 ??00 ??00	[]				
8219 ???? ?09	[]	Footrest, open with two tubes			
8299 9901 0001	[]	Footplate welded on footrest (Welded on tabs)			
8299 9901 0005	[]	Footplate screwed on footrest w/ tabs			
8299 9901 0003	[]	Footplate that can be flipped up to the rear			
8299 9903 0010	[]	Otto Bock swing-up footplate			
8350 9921 0001	[]	Rubber plated footplate			
	[]	Footrest, adjustable in height	Chose:-3,0 /-1,5 / 0 /+1,5 / +3,0 cm	_____ cm	(-) up (+) down , e.g.: -1,5 / +3,0
	[]	Footrest, fixed by welding			
	!	FRA: Angle of the footrest - measured in cm, topside back to front		_____ cm	
	!	FRD: Depth of the footrest		_____ cm	
8299 9901 2001	[]	Height of the adjustable footplate's bend		_____ cm	
	[]	FRP: Optional footplate pronounce, (std. 1, 3, 5 cm)		_____ cm	 Part of FRD
6910 0001 0001	[]	RH: Welded rings for leg strap. Height from floor including strap		_____ cm	 Std 23 cm
7660 0000 1011	[]	Heel straps for flip-up footrests			W5D and Dalton

! Upholstery (mandatory)					
7100 ???? 1009	[]	Extra wide back upholstery for a deeper shape of the back	Chose between +1/+2/+3cm	_____ cm	
Important!		Adjustable depth of the seat upholstery (SD). SD can be made up to 10 cm longer than shortest possible position (SD-min).			
7200 ???? 1009	[!]	SD: Requested seat length (default between 39 and 44 cm)			
7100 9999 001?	[]	Leather back upholstery (detachable part)	Black [] Red [] White [] Blue []	Choose color	
7100 9999 000?	[]	Leather on the upper corners of the back upholstery (default: Black)	Black [] [std] Red [] White [] Blue []	Choose color	
7100 9999 100?	[]	Wolturnus logo on back	[] Green [] Red [] Blue [] White		
7610 0000 0010	[]	Pocket on back upholstery - bottom	[] Small [] Large		

Pushhandles					[] NO / NEJ
8852 0002 1001	[]	PH: Pushhandles, quick-release, height over backrest tube (default)		_____ cm	
8852 0004 1001	[]	Tetra pushhandles	[] Fixed by screws [] Welded		
8852 000? 1001	[]	Adjustable pushhandles	[] Dia. Ø22 mm (only for pushing the wheelchair) [] Dia. Ø25 mm (for lifting)		
		! Height from floor to anticipated utility position		_____ cm	
8852 0005 1002	[]	Foldable pushhandles, fixed with screws (extra tubes welded on the back)			
8852 0005 1005	[]	Foldable pushhandles, mounted in top of back tube (hence the upholstery lacks padding on its top)			
8852 0003 10??	[]	Pushbar - Fixed angle	[] Straight [] Curved (drawing)		
8852 0003 10??	[]	Pushbar - adjustable by angle	[] Straight (drawing) [] Curved		

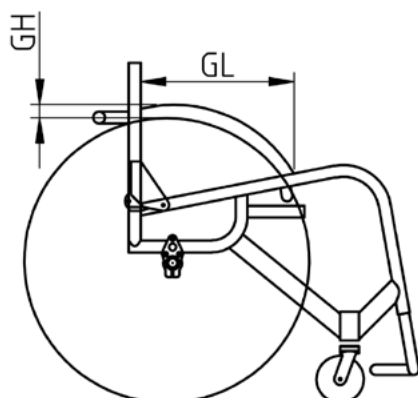
Wheel-locks (recommended choice) / <i>Bremser</i> (anbefalet valg)						
8851 1010 1001	[]	Push-action wheel-locks			 	
8851 1010 1003	[]	Push-action wheel-locks, bended handles (vertical)			 	
8851 1010 1101	[]	Push-action wheel-locks (plastic fibre)				
8851 1020 1009	[]	Scissor wheel-locks			 	
8851 1020 1109	[]	Scissor wheel-locks small (plastic fibre)				
8851 1030 1009	[]	Single stop wheel-lock	!	[] Handle, left	[] Handle, right	18", 20" and 22" wheels only
8851 2010 1009	[]	One-hand activated wheel-lock	!	[] Handle, left	[] Handle, right	Needs extra space!
8851 1011 1001	[]	Pull-activated wheel-lock			 	
8851 1011 1101	[]	Pull-activated wheel-lock (plastic fibre)				
8851 1012 2002	[]	Extensions for handles on the wheel-locks (for brakes with straight handles only)				
8537 2811 10??	[]	Drum brakes with lockable grips with activation cables				

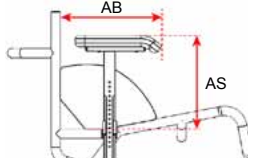
Anti-tip (recommended choice)					[] NO / NEJ
8861 1010 1300	[]	Swing away anti-tip - Right			
8861 1010 1300	[]	Swing away anti-tip - Left			
8861 1010 ??01	[]	Centermounted anti-tip			(Welded tube, rear)
	!	AF: Height from floor	_____ cm	AW: Distance to axle	_____ cm


Sideguards and Armrests / Sidestykker og armlæn


8810 2410 1001	[]	Dibond sideguards (default option)			 Dibond sideguard
8810 2410 2001	[]	Dibond sideguards (tailor-made)			
8812 2401 0009	[]	Carbon sideguards with mudguard Note: Fixed curve			 Carbon sideguard with mudguard
8812 2401 1009	[]	Carbon sideguards without mudguard (tailor-made)			
8812 2402 0009	[]	Welded-on aluminum sideguards			 Alu sideguard welded on
8812 2402 0020	[]	Welded-on aluminum sideguards with mudguard			
8812 2403 0009	[]	Aluminum sideguards 2 mm, fixed with screws			 Alu sideguard fixed with screws
8812 2403 0010	[]	Aluminum sideguard with mudguard, fixed with screws			
These options are defined in advance by default	!	GH: Height from tires to the upper edge of the sideguards		_____ cm	If GL is not defined, the sideguards will follow the wheels by distance GH
Ved standardvalg er disse valgt på forhånd.	!	GL: Length from the back tubes to the front of the sideguards		_____ cm	See drawing below
	!	Mudguards, coverage (default, to the middle of the tire)		_____ cm	From inside to outer edge
7670 0000 00??	[]	Thermal protection for sideguards (default)	[] Left/ [] Right/ [] 3 mm (std) [] 10 mm [] 20 mm		
8831 2410 1008	[]	Nylon side guards, including inside aluminum rails/bands			
8831 2410 1001	[]	Armrest with ABS sideguards			
8831 2410 1004	[]	Reinforced armrest with ABS sideguards			

Choose armrest pads on the next page



9510 0008 0126	☐	23,5 cm armrest pad, displaced by 2 cm		
9510 0008 0122	☐	27 cm armrest pad, displaced 2 cm		
9510 0008 0125	☐	37 cm armrest pad, long, displaced 2 cm		
9510 0008 0127	☐	26 cm leather armrest pad, width 8 cm		
9510 0008 0128	☐	31 cm armrest pad, leather, width 8 cm		
9510 0008 0119	☐	16 cm armrest pad, short		
9510 0008 0220	☐	23,5 cm armrest pad, short (default)		
9510 0008 0121	☐	27,5 cm armrest pad		
	!	AS: Height from the seat tube to the top of the armrest	_____ cm	
	!	AB: Length from the front of the backrest to the front of the armrest	_____ cm	

Headsupport					[] NO	
8841 0001 4001	!	Headsupport, adjustable - choose cushion below		HH: _____cm	HD: _____cm	
		9510 0008 0130	[] Small rounded (23 x 10 x 4 cm)			
		9510 0008 0131	[] Large rounded (30 x 14 x 4 cm)			
		8841 0000 100	[] Small square			
		8841 0000 1020	[] Large square			
		8400 0010 0012	[] Gel headrest, small (19 x 15 x 5 cm)			
		8400 0010 0011	[] Gel headrest, large (28 x 19 x 7,6 cm)			
8841 1000 1010			[] Attachment for strap fixation (to protect the neck, when using body straps)			

Bodysupport (drawings on page 16)							
8840 1010 0001	[]	Bodysupport, adjustable, right side - choose cushion below			XX: _____cm	YY: _____cm	
8840 1010 1002		Bodysupport, adjustable, left side - choose cushion below			XX: _____cm	YY: _____cm	
		8840 1010 1010 [] Small 6 x 10 cm		8840 1010 1011 [] Medium 8 x 12 cm			
		8840 1010 1012 [] Large 12 x 12 cm		8840 1010 1075 [] Custom ____X____cm			

Car fixation				[] NO
8870 0020 0001	[]	4-point fittings for strap fastening		
887000200011	[]	Fittings for Dahl Docking Station <i>Beslag til Dahl Docking Station</i>		

Accessories / Tilbehør								[] NO
6910 0002 0020	[]	Tip assistant pedal	[]	Right	[]	Left		
8862 1010 1001	[]	Double crutch holder (2 x Ø47 mm)	[]	Right	[]	Left		
8831 2410 1002	[]	Swing-away armrest, attached behind the back tubes (See page 4, section 1)						Go to p. 4, section 1
	[]	Seat-armrest top	_____cm	Length from back:	_____cm			
88520 0100 1001	[]	Caster pin locks (activated by cables)						
8537 2811 1009	[]	One-hand propelling (22" and 24" spoke wheels)						
9530 0114 0120	[]	Quick-release axle with Tetra grip						
8624 0000 1009	[]	Front forks with quick-release axle (detachable)						
8513 0600 1009	[]	Transit wheel for entering through narrow doorways						
	[]	Extra wheel(s) as req., see next page	[]	1 Pair	[]	1 pcs.		
7600 0001 00??	[]	Frame protectors	[]	Front tubes	[]	Backrest tubes		
7610 0000 00??	[]	Bag for catheter etc. (can be fixed under the seat)			[] Small	[] Large		
6910 0001 0113	[]	Mounting for Batec auxiliary motor or hand bike						

Fill in and send to 49 Bespoke Inc.

Subject to Technical Modifications and Printing Errors

© Wolturnus AS OF W5 EN-DA 2016 v5.4

Front Wheels (Casters)					[] NO
8600 1020 0801	Front wheel Skater 80 mm				[]
8600 1020 1001	Front wheel Skater, 100 mm				[]
8632 0100 2009	Front wheel skater w. light 100 mm				[]
8631 0125 1001	Front wheel Skater, 125 mm				[]
8600 1010 1001	4" Front wheel grey, 26 mm width				[]
8600 1010 1002	4"Front wheel grey, 32 mm width				[]
8600 1010 1251	5" Front wheel grey, 29 mm width				[]
8600 1010 1253	5" Front wheel grey 40 mm width				[]
8600 1010 1401	Front wheel grey, Ø140 mm				[]
8600 1010 200?	4" Fiber plast front wheel 34 mm width				[]
8600 1010 2015	5" Fiber plast front wheel 34 mm width (Only in black)				[]
	Colour on front wheel rim - Fiber wheel only				
	[] Black	[] Blue	[] Red	[] white	[] Silver
8600 1020 1051	4" Alu front wheel 35 mm width				[]
8600 1020 1252	5" Alu front wheel 35 mm width				[]
	Colour on front wheel rim				
9664 0100 0720	[] Black	[] Silver	[] Green	[] Red	[] Orange
		[] Blue	[] Purple	[] Yellow	[] Pink
Colour Front Wheel Fork					
8999 9999 0004	[]	Black			
8999 9999 0005	[]	Nature / silver			
8999 9999 0006	[]	Red			
8999 9999 0007	[]	Blue			

Rear Wheels / Drivhjul		[] NO / NEJ			
		22"	24"	25"	26"
8510 2?10 1009	Spoke wheels (standard)	[]	[]	-	[]
8510 2510 1009	Spoke wheels (standard)	-	-	[]	-
8532 2410 1009	Decon Spider Black	-	[]	-	-
8532 2411 1009	Decon Spider Silver	-	[]	-	-
8535 2?10 1?08	Spinergy 12 spokes LX	-	[]	[]	-
8535 2?10 1?09	Spinergy 18 spokes L	-	[]	[]	-
	Colour Spinergy spokes				
	[] Std. Black		[] Blue	[] White	[] Red
			[] Orange	[] Yellow	[] Pink
					[] Green
8537 292? 2401	Upgrade Wrex Light 24 crossed spokes	-	[]	[]	-
8537 292? 3601	Upgrade Wrex Light 36 radial spokes	-	[]	[]	-

Pushrims / Drivringe		[] NO			
		22"	24"	25"	26"
Mounting	[] Short				
Montering	[] Long				
8551 ??10 2009	Alu pushrims (default)	[]	[]	[]	[]
8555 ??00 0009	Titan pushrims Ø 19	[]	[]	[]	[]
8554 ???? 0009	High friction pushrims	-	[]	[]	[]
8552 2401 0001	Decon Alu pushrims	-	[]	-	-
8552 2401 0002	Decon Titan pushrims	-	[]	-	-
8552 2401 0003	Decon Dual grip / S-friction	-	[]	-	-
8553 ??01 0009	Dual grip / S-friction	[]	-	[]	-
8553 2406 0009	Surge LT oval 6L	-	[]	[]	-
8561 2410 0001	Plastic pushrims	[]	[]	-	[]
8550 2?10 3009	Steel pushrims	[]	[]	[]	[]
8554 ???? 0009	Maxgrepp Ergo Para cp	[]	[]	-	-
8554 ???? 0008	Maxgrepp Original pushrim Ø25 mm (Mossrubber)	[]	[]	[]	-
8554 ???? 0009	Maxgrepp Original pushrim Ø32 mm (Mossrubber)	-	[]	-	-
8554 ??08 0009	Curve L TG (friction)	-	[]	[]	-
8557 ??03 0001	B-Braver, short mounting	[] Orange	[] Black	[] White	[]*
8557 ??03 0002	B-Braver, long mounting	[] Orange	[] Black	[] White	[]*
		* Only black			

Tyres		[] NO			
		22"	24"	25"	26"
9662 0000 00??	Standard tires, grey 1"	[]	[]	[]	[]
9662 0001 000?	Schwalbe Marathon, black, 1"	[]	[]	[]	[]
9662 0001 00??	Schwalbe Marathon, grey, 1"	-	[]	[]	-
9662 2401 0009	Solid tire, grey, 1"	-	[]	-	-
9662 2401 0011	Schwalbe Right Run, blue, 1"	[]	[]	-	-
9662 2401 0012	Schwalbe Right Run, red, 1"	[]	[]	-	-
9662 2401 0007	Schwalbe Marathon, grey, 1-3/8"	-	[]	-	-

Tires		[] NO			
		22"	24"	25"	26"
9662 2402 0001	Table Top 57-507 (outer measures same as 25")	-	-	[]	-
9662 2402 0004	Landcruiser 24" 50-507" (outer measures same as 24")	-	[]	-	-

Spoke Guards		22"	24"	25"	26"
8571 0010 2117	Girl	[]	[]	-	-
8571 0010 2109	Bat	[]	[]	-	-
8571 0010 2115	Dolphin	[]	[]	-	-
8571 0010 2116	Globe	[]	[]	-	-
8571 0010 2111	Dragon	[]	[]	-	-
8571 0010 2114	Horses	[]	[]	-	-
8571 0010 2110	Lightning	[]	[]	-	-
8571 0010 2112	Lion	[]	[]	-	-
8571 0010 2113	Shark	[]	[]	-	-
8571 0010 2118	Spider	[]	[]	-	-
8571 0010 2009	TRANSPARENT	[]	[]	[]	[]

Custom-made

Description

Drawing

